



AQUA ILLI

Data Sheet

Innovative design, cutting-edge technology, and premium aesthetics.
The highest performing tap on the market today.

A **BRITVIČ** PLATFORM



FEATURES.

- Patented boiler design gives high volumes of boiling water
- Perfect water flow with zero splash
- Removable dispense nozzle for improved hygiene
- Plumbed-to-waste flush-fitting drip tray
- Safe dispense with a touch padlock feature
- Installed in modular form to fit into the tightest of spaces
- Pre-set fill volumes for any vessel and free flow options available
- Equality Act compliant
- Touch or touch-less modules available
- Tap extensions available for dispensing into various bottle heights.



AVAILABLE FINISHES



SATIN BLACK CHROME

CAPACITY



BOILING

PER HOUR

High

up to **45** litres or **180** cups

Ultra high

up to **90** litres or **180** flask/tea pots



CHILLED / SPARKLING / AMBIENT

PER HOUR

up to **45** litres or **180** glasses

up to **45** litres or **240+** glasses

*Based on the following measurements: 1 cup/glass = 250ml & 1 flask/tea pot = 500ml

TALK TO US

London showroom: 1 New Street, London, EC2M 4TP

www.aqualibra.com | 0800 080 6696 | hello@aqualibra.com

PRE-INSTALLATION REQUIREMENTS



1

WATER.

No. 1 x Potable cold mains water supply terminating in a 15mm Ballofix isolation valve.

2

POWER.


No. 3 x 220 - 240V ac 50Hz
Single switched 13A power sockets.

3


WASTE.

No. 1 x 40mm upstand trapped waste supply.

Please note, the back panel must be removed before installation.
Visit www.aqualibra.com/ventilation for all ventilation options.

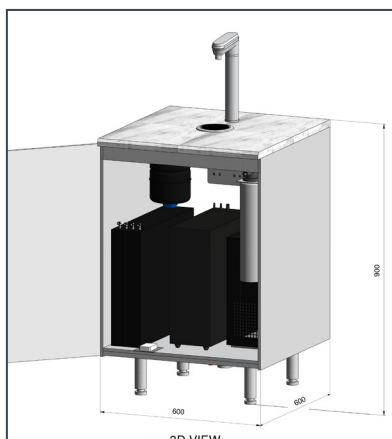

Aqua illi - BCA Full Installation

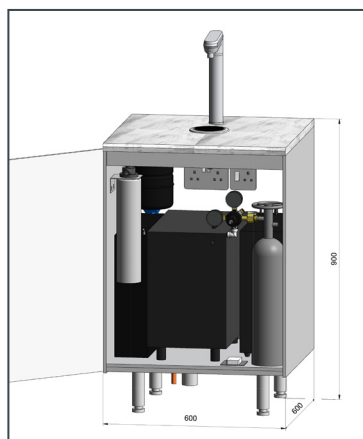

Aqua illi - BCS Full Installation

