


VENTILATION OPTIONS


Please note, in all cases the back panel MUST BE removed before installation.


To enable the appropriate air flow, if possible, please ensure the side panels are not fitted directly to the back wall. We advise a 35mm void.



BASE CUTOUT (FOR END CABINET)

Ventilation can be made to the base of the cabinet, with the removal of a narrow section of floor, immediately behind the door and trim with roll edging strip. Typical cut-out size must not be less than 35mm deep.





SIDE VENTILATION (FOR END CABINET)

Ventilation grilles cut in the side of a standard 600mm cabinet. The grilles may be fitted on either side provided they ventilate into a free and unobstructed area.

BASE CUTOUT & DOOR VENTILATION (FOR TERRACED UNIT)

Ventilation can be made to the base of the cabinet, with the removal of a narrow section of floor, immediately behind the door and trim with roll edging strip. Typical cut-out size must not be less than 35mm deep. Ventilation grill cut in high level on a standard 600mm cabinet door.

BCS SYSTEM = BOILING, CHILLED & SPARKLING

PLEASE NOTE:

All the ventilation options are based on the refreshment areas/kitchens temperatures up to 32°C.

PLEASE NOTE:

Additional smart ventilation options are available on request.


VENTILATION GRILLS

Aqua Libra Co supplies the below ventilation grills. Please contact the install team to discuss and confirm if your preferred option or bespoke ventilation grills can be used.

Ventilation Grill (450 x 70 mm)

Recess Mounting Matt Silver Ventilation area 81.22 cm2 Length 450 mm(recessed length 424 mm) Height: 70 mm

Oval slots arranged in parallel

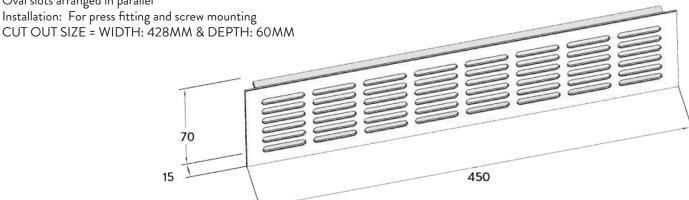

Ventilation Grill (450 x 100 mm)

Recess Mounting Silver F1

Ventilation area 142 cm2

Height 100 mm(recessed height 86mm) Length: 400mm (flange length 76mm)

Oval slots arranged in parallel

Installation: For press fitting and screw mounting 100 400